






- 1 UV Layer:** Ensure Superior Stain-resistant and water-proof performance, saving maintenance costs.
- 2 Transparent Wear Layer:** Restore the authentic color and embossing, protecting it from abrasion.
- 3 Decorative Layer:** Regardless of natural wood or stone structure, we offer a variety of pattern choices that will better showcase your personality.
- 4 SPC Core:** Prevent expansion and contraction of the flooring, cover sub-floor imperfection.
- 5 IXPE (Optional):** Better sound absorption and excellent underfoot feeling.

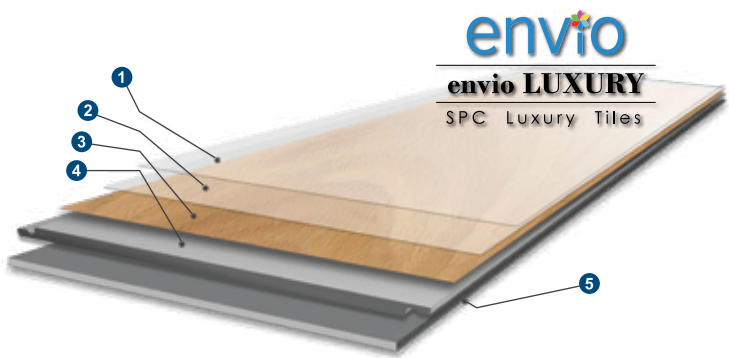

Fire Resistant

Water Resistant

VOC-Free

High Strength

Zero Shrinkage

Slip Resistant

Sound Reduction

Anti Bacterial

Easy Installation

ADVANTAGES

- Sound Reduction
 - Slip Resistant
 - Easy to install and maintain
 - Durable
- Water Resistant
 - Scratch Resistant
 - Eco-friendly
- Fire Resistant
 - Good footfeeling
 - 100% Virgin Material



TECHNICAL DATA

Test Item	Test standard		Results
Overall Thickness	ISO 24340:2006	ISO 10582:2012	Pass
Thickness of layers	ISO 24340:2006ISO 10582:2012		Pass
Determination of peel resistance	ISO 24345:2012		Pass
Sliding Properties	EN14041		Class DS
Formaldehyde	EN 717		E1
Smoke Generation	ENISO9239-1		Class S1
Critical Heat Flux	ENISO9239-1		Class B
Flame Spread	ENISO11925-2		Class B
Reaction to Fire	EN13501-1		Bf1-S1
VOC: French emissions	ENISO16000-09:2006 ENISO 16000-06: 2011EN ISO 16000-03: 2011		A+
Resistance to stain chemical resistance	EN423		Resistant
Dimensional stability	EN 434		X direction:-0.04% / Y direction: 0.02%
Curling after exposure to heat	EN 434		~0.01mm
Determination of Indentation and Residual Indentation	ISO 24343-1:2007		Pass
Chair caster	ISO 4918:2009 (refer to EN425:2002)		Pass
Color fastness	ISO105-B02		> =6
Phthalate Test (DBP/BBP/DEHP/DINP/DNOP/DIDP)	EN 14372:2004		Pass

- The image shown in this brochure are for illustration purposes. Please refer to actual sample for final selection and confirm all specifications, colours & product availability with our Sales team, distributors, agents or dealers.
- The above specification serves as a general guideline only. For detail product specification kindly refer to our Sales Team.

Imported By:
AS TILES & INTERIOR DESIGN SDN BHD (1365529-M)
Showroom Address

Ground Floor of Lot 3037, Lorong 8,
Jalan Tun Ahmad Zaidi Adruce,
93200 Kuching, Sarawak.
Telephone Number : Raymond Tan **012-3557683**

Copyright 2020 by ASTEEL GROUP. All rights reserved. No part of this brochure may be reproduced, stored in a retrieval system, or transmitted in any form by any means, electronic, mechanical, photocopying, recording or otherwise, without written permission of ASTEEL GROUP.



Size : 310mm x 620mm
Thickness : 4.0mm